

# Shrink Tunnel

Model:

# PP1808-44

General purpose machine for a wide variety of applications.



The **PP1808-44 Tunnel** is a great general purpose shrink tunnel that can be used for a wide variety of applications. Can be used with shrink bands, neck bands, full body sleeves, used with shrink film, used as drying or curing tunnel etc.

## Standard Features Include:


- Fully Re-Circulating Air Chamber
- Live Roller Rod Conveyor
- Digital Temperature Control 0-400°
- Adjustable Air Velocity Control
- State-of-the-Art AC Variable Speed Drive 0-75 FPM
- Chromed Conveyor Rollers and Shaft (No Rust)
- Automatic Tunnel Cool Down with Shut Off
- 1HP Blower Motor
- Sealed Bearings on Drive and Idler Shafts
- Chamber Size 18"W x 8"H x 44"L
- Quietest Tunnel on the Market
- Heats up to 300° F in less than 15 minutes
- Thermal Overload Protection on All Motors
- Locking Casters
- Adjustable leveling pads 32" - 36.5"
- Anti-Jam Safety Features on Conveyor
- 9 KW Heater Bank
- 2 year warranty

## Models & Specifications

MODEL	VOLTS	POWER PHASE	AMPS	WEIGHT	TUNNEL OPENING			SPEED
					L	W	H	
PP1808-44	220	1	40	675	44	18	8	0-75 FPM
PP1812-44	220	1	40	695	44	18	12	0-75 FPM
PP1816-44	220	1	40	725	44	18	16	0-75 FPM

## Options:

- 12" and 16" Tunnel Opening
- Falcon Belting
- High Density Rollers-Close Roller Spacing 1/2" Gap
- Teflon Mesh Belt



Falcon Belting



Teflon Mesh Belting



Stainless Steel Metal  
Mesh Belting



High Density Rollers - Close  
Roller Spacing 1/2" Gap




Variable Air Velocity




Variable Speed Control  
0 - 75 FPM




Digital Temperature Control



Lighted Viewing Window



Adjustable Leveling Pads

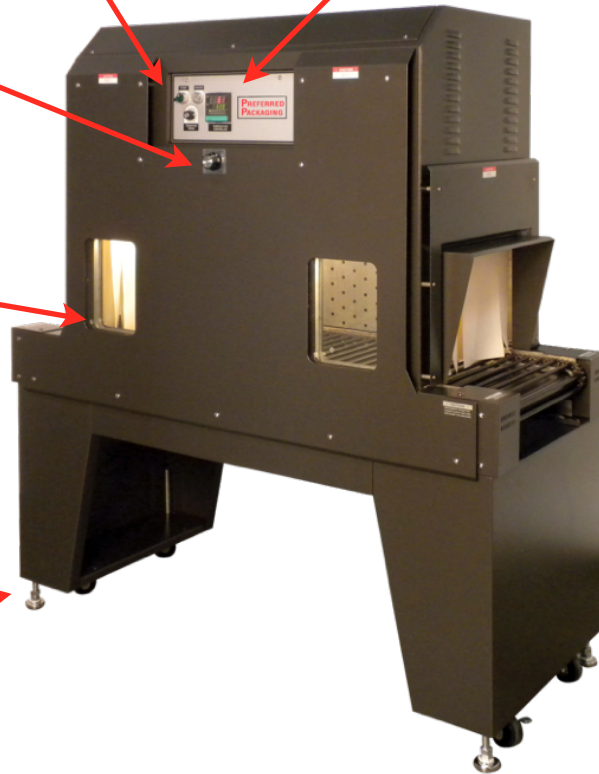

PP1812-44 and PP1816-44  
Available for Taller Package Sizes



\* Stainless Steel Frame  
Construction Available

## Technical Drawing

