

**OVERVIEW**

The new "Preferred Pack" PP-5600E/PP1808-28 is a fully automatic L'Sealer and Shrink Tunnel that is sold as a set or individually. This economical, entry level, fully automatic system is great for customers who have one or two semi automatic L'Sealers now and need more speed or want to automate without spending a lot of money.

With the high cost of labor, this fully automatic system can reduce labor costs, maximize productivity and increase efficiency.

Seal Area	22"L x 18"W x 6"H
Machine Speed	20-25 PPM
Electrical	220V, 1 Phase, 10 Amp
Air	3 cfm @ 80 psi
Minimum pkg size	4" x 2.5" x 1/8"
Maximum pkg size	20"L x 16"W x 4.75"H
Maximum film width	23"
Tunnel chamber dimensions	28"L x 18"W x 8"H
Tunnel Weight	450 lbs
L'Sealer Weight	900 lbs
Warranty	1 year on parts

**L'SEALER FEATURES**

- Speeds up to 20-25 PPM
- Fast product changeovers
- Teflon coated hot knife seal blade
- Fixed conveyor speed at 70 FPM
- Pin wheel hole punch
- Dual emergency stop switch
- Self Contained scrap removal system with built-in alarm when full

**SHRINK TUNNEL FEATURES**

- Lighted viewing window
- Chamber size 28"Lx18"Wx8"H
- Energy efficient
- 1/2 HP blower motor
- Fully re-circulating air chamber
- Live roller rod conveyor
- Digital temperature controller 0-400°
- 7.5KW heater bank
- Variable speed drive 0-90 FPM
- Automatic cool down and shut off
- CE Approved safety system Exceeds OSHA safety standards

**OPTIONS**


- Pneumatic hole punch
- 3ft or 6ft flighted infeed
- 3ft or 6ft belted conveyors
- Flight bar conveyors for multi-packs
- Variable speed conveyor (0-90 FPM)
- Closing conveyor
- Print registration



**Belted Infeed**



**Flighted Infeed**

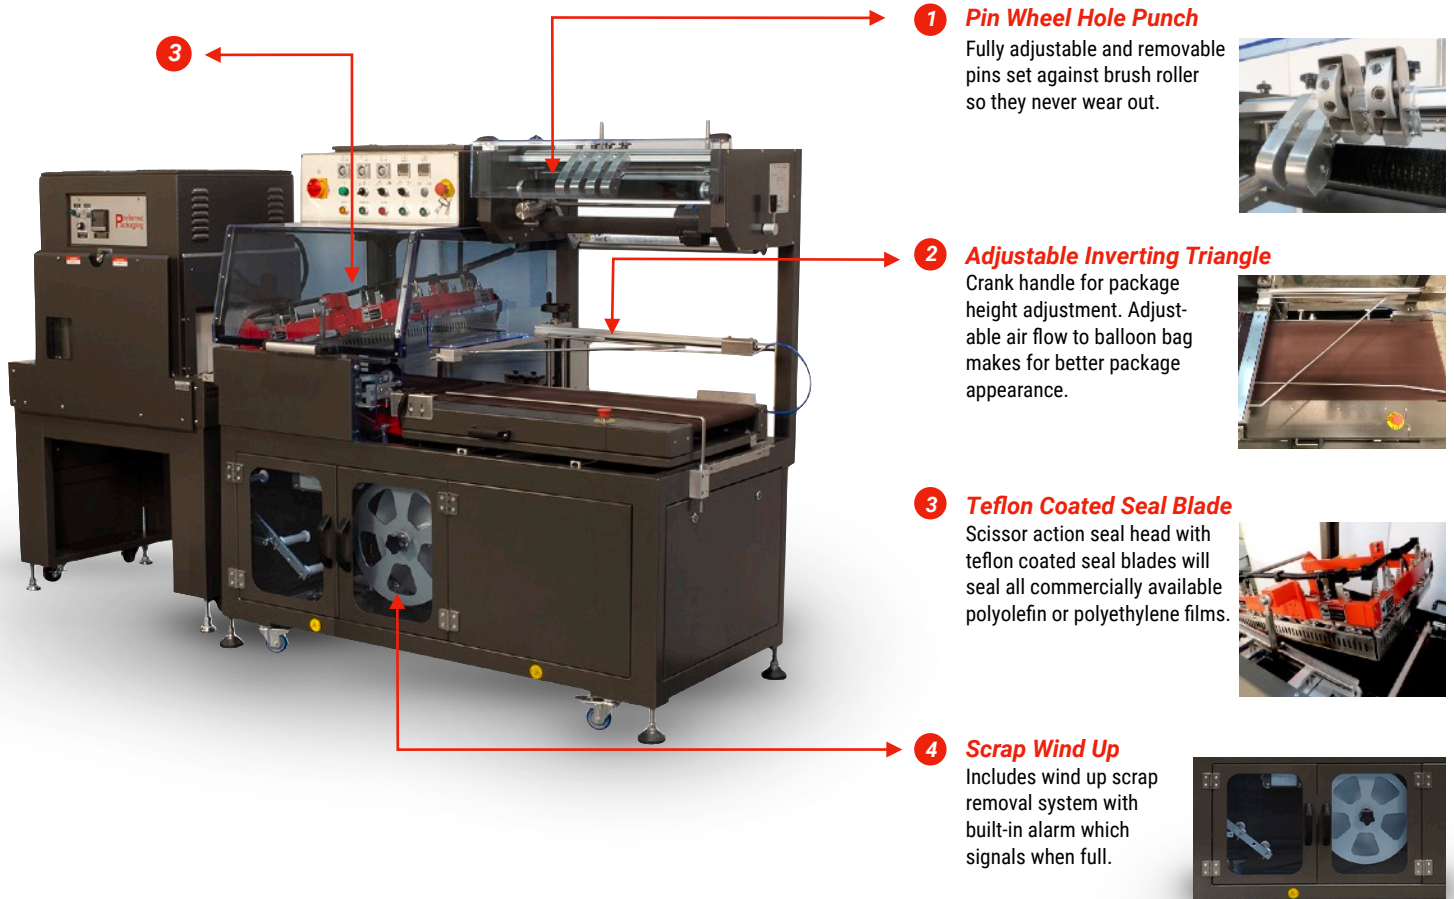

**Technical Drawing**

