

Shrink Tunnel

Model:

PP2612-52

General purpose shrink tunnel for a wide variety of applications.

Standard Features Include:


- Fully Re-Circulating Air Chamber
- Live Roller Rod Conveyor
- Digital Temperature Control 0-400°
- Adjustable Air Velocity Control
- State-of-the-Art AC Variable Speed Drive 0-75 FPM
- Chromed Conveyor Rollers and Shaft (No Rust)
- Automatic Tunnel Cool Down with Shut Off
- 1HP Blower Motor
- Sealed Bearings on Drive and Idler Shafts
- Chamber Size 26"W x 12"H x 52"L
- Quietest Tunnel on the Market
- Heats up to 300°F in less than 15 minutes
- Thermal Overload Protection on All Motors
- Locking Casters
- Adjustable leveling pads 35" - 39.5"
- Anti-Jam Safety Features on Conveyor
- 15 KW Heater Bank
- 2 year warranty



The **PP2612-52 Tunnel** is a great general purpose shrink tunnel that can be used for a wide variety of applications. Can be used with shrink bands, neck bands, full body sleeves, used with shrink film, used as drying or curing tunnel etc.

Available Options:

- 16" or 20" Tunnel Height
- Close Roller Spacing 1/2" Gap
- Teflon Mesh Belt
- Stainless Steel Metal Mesh Belt



Falcon Belting



Teflon Mesh Belting




Stainless Steel Metal Mesh Belting



High Density Rollers -

Close
FOR MORE INFO
SCAN QR CODE:




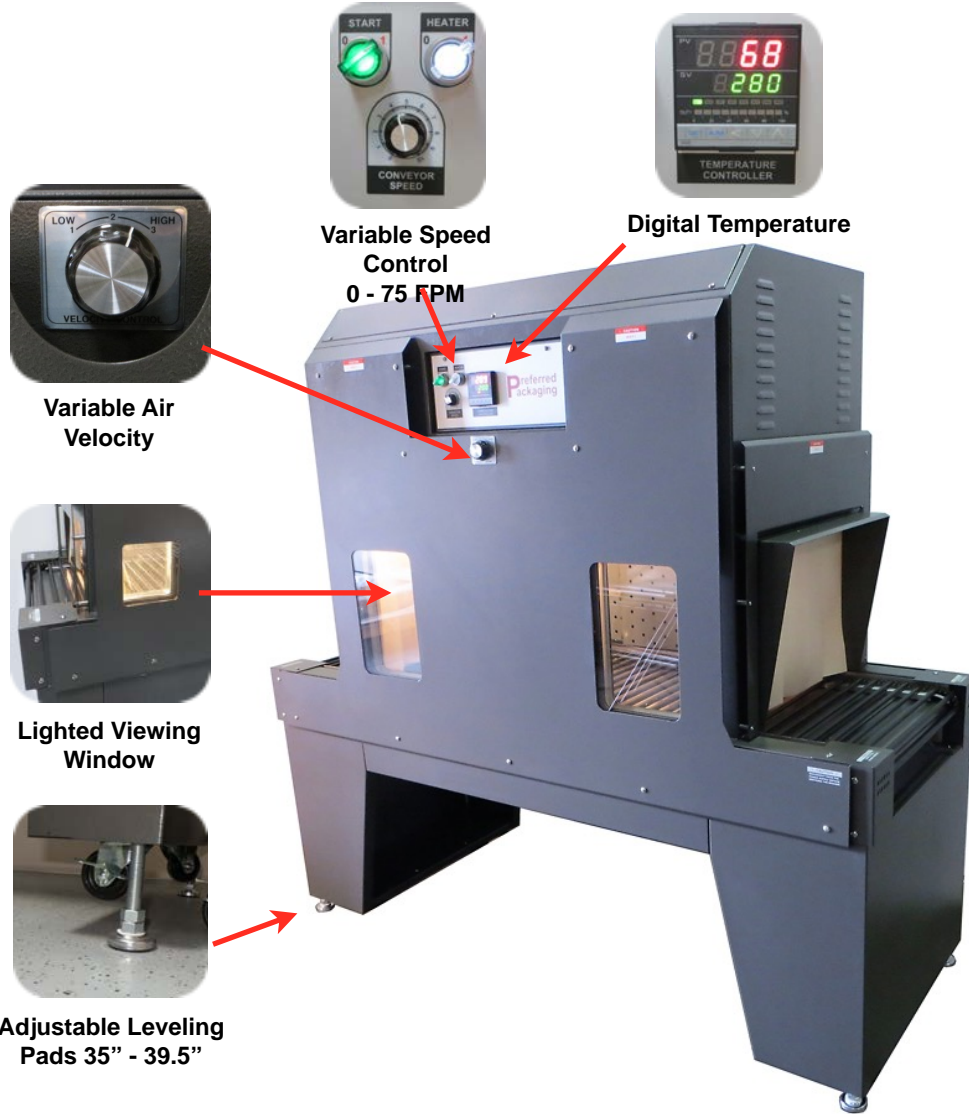

PP2212-48 and PP2216-48
Available for Taller Package



* Stainless Steel
Frame
Construction
Available

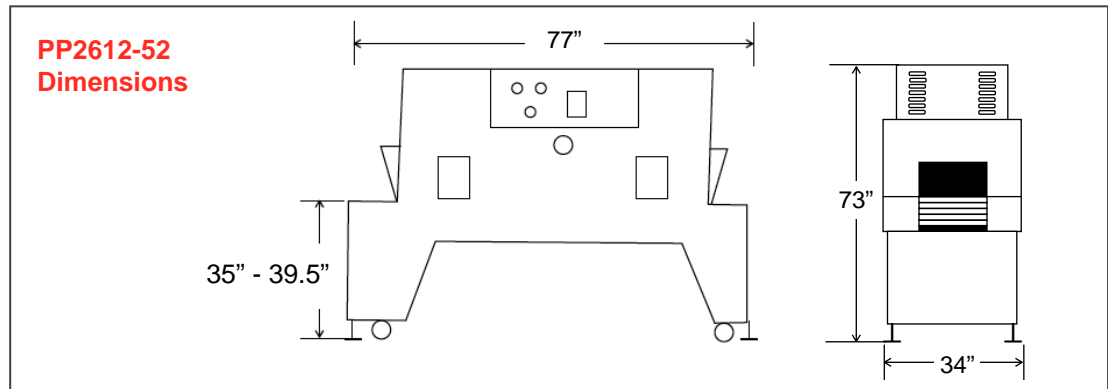

Specifications:

MODEL	POWER			WEIGHT NET/SHIPPING	TUNNEL OPENING			SPEED	MACHINE DIMENSIONS		
	VOLTS	PHASE	AMPS		L	W	H		L	W	H
PP2612-48	220	3	50	600/800	48	26	8	0-75 FPM	77	34	73
PP2616-48	220	3	50	630/820	48	26	12	0-75 FPM	77	34	77
PP2620-48	220	3	50	660/840	48	26	16	0-75 FPM	77	34	81